



1




2

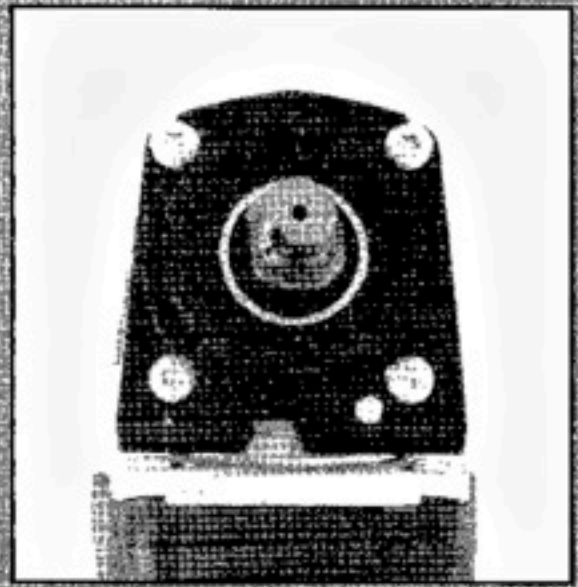

3

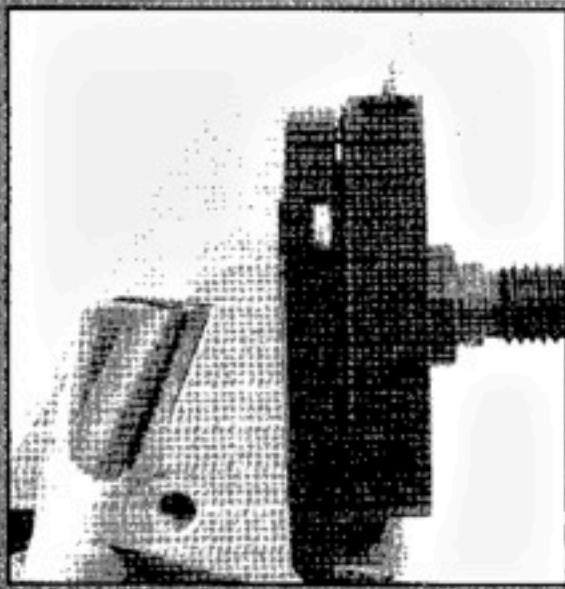


4

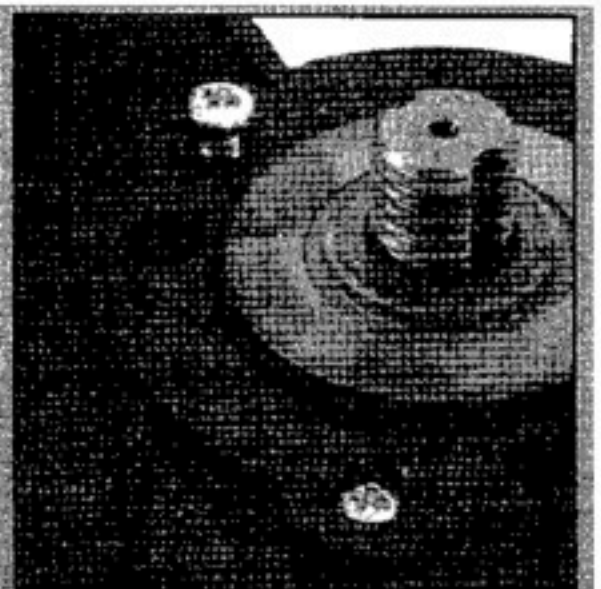

5



6

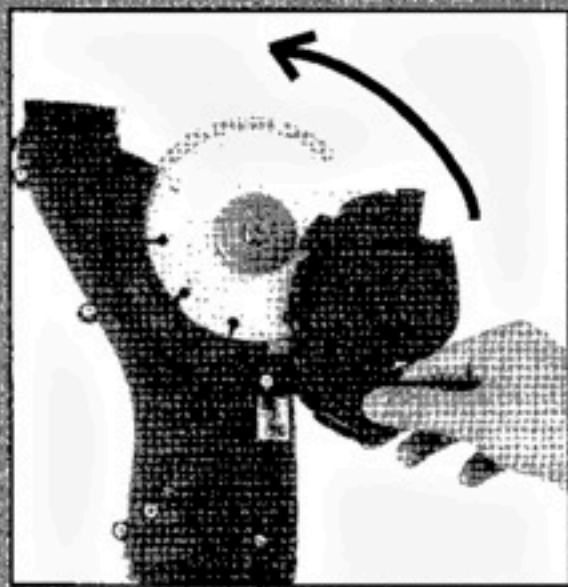

**IMPORTANT:
BEFORE FITTING THIS EXHAUST HOOD, MAKE
SURE YOU HAVE A WELL-FITTING CONNECTING
RING!**

Connecting rings are suitable for various models, including models of KGS/FLEX/DEWALT/BOSCH/MAKITA/METABO. Read the relevant packaging for further information. The connecting ring is not included with the exhaust hood!

The exhaust hood must be fitted with great care.

Any modifications, which you or your supplier make to your angle grinder, are for your own risk. Any liability that may ensue from (incorrectly) fitting the Dusttool exhaust hood on a angle grinder, regardless of the brand, cannot be recovered from the importer and/or the producer.

If you cannot agree with the above, or if you do not agree with the liability clause, you may send this product with packaging, connecting ring and original purchase bill, postage paid back (see elsewhere for the address). Please download the return form, complete the form and send everything postage paid. The original purchase amount will be refunded to you within 10 working days. From the moment that you fit the DUSTTOOL exhaust hood on your angle grinder, you agree that you are personally responsible for any damage, which may result from (incorrectly) fitting the Dust-tool exhaust hood on an angle grinder of whatever brand.

- This set contains:
- 1) Dusttool exhaust hood W-125
 - 2) Allen keys in two sizes 3mm & 4mm
 - 3) 3 bolts to fit the exhaust hood on to the connecting ring
 - 4) 1 flask of locking agent
(please note: extremely adhesive)

Fitting instruction:

1. Take off the original protection hood (see Note in this respect).
2. Fit the connecting ring with the included allen bolts on to the angle grinder.
The correct size allen bolts are included with the connecting ring.
3. Firmly tighten the bolts. It should not be possible to turn the ring by hand.
4. Then fit the exhaust hood on to the ring with the included 4x12mm bolts.
5. First, loosen one allen bolt of the connecting ring, insert sufficient locking agent, and then screw the bolt back on again. Now loosen the other allen bolt, insert locking agent and screw the bolt back on again, in such a way, that the exhaust hood can still be turned.
6. To replace the disc, the front part can be removed.

Instructions for use:

Use the angle grinder in a responsible manner and always hold it firmly with two hands. Always observe the applicable safety instructions.

The Dusttool exhaust hood has been developed with the greatest care, and is intended to collect as much dust as possible. Still, you are advised to wear a dust mask during use.

In case the grinding disc breaks, the complete hood must be replaced.

Warranty

The Dusttool W-125, W-230 and F-125 come with a standard warranty valid for a period of 12 months, starting on the purchase date. To claim under the warranty, the purchase bill or copy thereof must be submitted. The warranty pertains to the repair or replacement of the product or parts thereof, if defects have arisen, which can be traced back to defects in materials and/or workmanship.

- The warranty will not apply in case of:
 - Defects or damage, arisen by wrong use or connection.
 - No or poor maintenance.
 - Information and/or the assembly instruction from the manual has not been followed properly.
 - The machine, with the exhaust hood mounted, has been used by untrained persons.
 - The machine, with the exhaust hood mounted, has been used for unsound purposes.
 - The machine, with the exhaust hood mounted, has been repaired with non-original parts.
 - The machine code has been impaired or removed.
 - Defects arisen as a result of fire, moisture and/or transit damage.